


VRE4336 AND VRE4342



OUTDOOR VENT-FREE GAS FIREPLACES

Framing Dimensions

Corner Installation

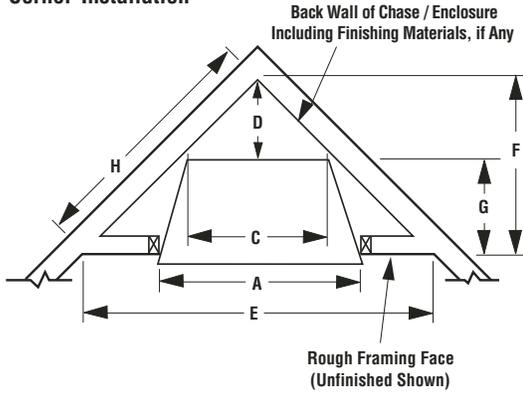

Parallel Installation
Rough Framing Face
(unfinished shown)

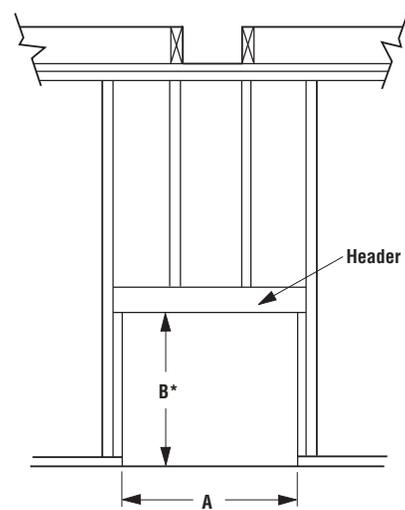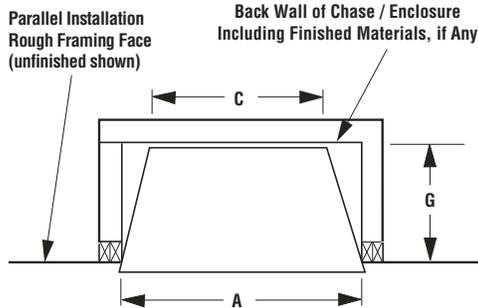


* Increase Framing Height By 3/4 (19)
When Using Optional Drain Pan

| Model | A | B | C | D | E | F | G | H |
|-----------|------------------|------------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|
| 36" Model | 42-3/4 (1086) | 46-1/2 (1181) | 23-5/8 (600) | 11-1/4 (286) | 63-1/2 (1613) | 31-3/4 (807) | 20-1/2 (521) | 44-1/4 (1124) |
| 42" Model | 48-3/4 (1238) | 46-1/2 (1181) | 29-5/8 (753) | 14-1/4 (362) | 69-1/2 (1765) | 34-3/4 (883) | 20-1/2 (521) | 49-1/8 (1248) |

Inches (millimeters)


Fireplace Dimensions

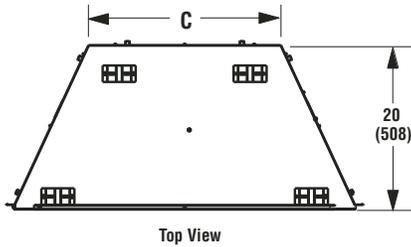


Top View

| Model | A | B | C |
|-----------|--------------|------------------|-----------------|
| 36" Model | 37 (940) | 41-3/4 (1061) | 23-1/2 (597) |
| 42" Model | 43 (1092) | 47-3/4 (1213) | 29-1/2 (749) |

Inches (millimeters)

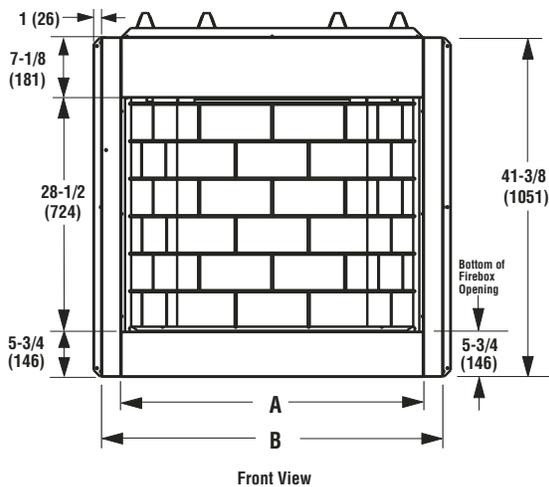

Front View

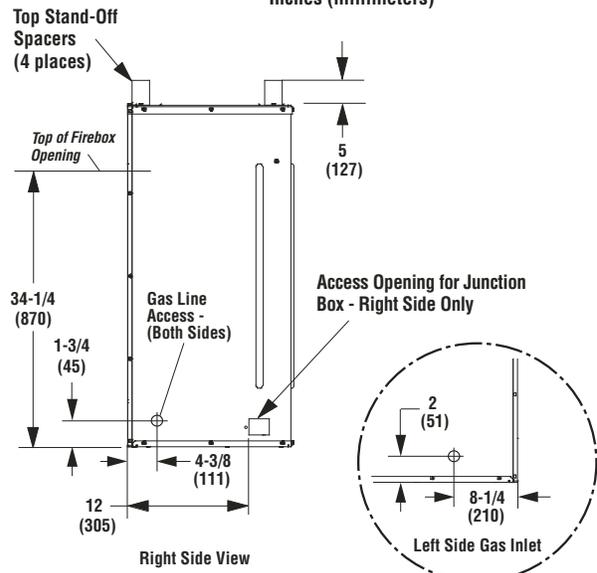

Right Side View

Diagrams, illustrations and photographs are not to scale. Consult installation instructions. Product designs, materials, dimensions, specifications, colors, and prices are subject to change or discontinuance without notice.

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

VRE4336 AND VRE4342

Product Information

| Cat. No. | Model | Ship. Weight (lbs) | Shipping Volume |
|----------|------------|--------------------|-----------------|
| F0511 | VRE4336ZEN | 265 lb.s | 33.1 Cu. Ft. |
| F0512 | VRE4336ZEN | 265 lb.s | 33.1 Cu. Ft. |
| F0513 | VRE4336ZEP | 265 lb.s | 33.1 Cu. Ft. |
| F0514 | VRE4336PEP | 265 lb.s | 33.1 Cu. Ft. |
| F0515 | VRE4342ZEN | 276 lb.s | 36.8 Cu. Ft. |
| F0516 | VRE4342ZEN | 276 lb.s | 36.8 Cu. Ft. |
| F0517 | VRE4342ZEP | 276 lb.s | 36.8 Cu. Ft. |
| F0518 | VRE4342ZEP | 276 lb.s | 36.8 Cu. Ft. |

Listing Information



Report No. F14-020


These appliances comply with National Safety Standards and are listed by PFS Corporation to ANSI Z21.91 and CAN 1-2.21 M85 Ventless Firebox Enclosures for Gas-Fired Unvented Decorative Room Heaters.

CLEARANCES

Minimum clearance to combustibles for the fireplace is as follows; sides and back – 1/2” (13mm), combustible floor – 0” (0mm), adjacent wall 6” (152mm), ceiling – 72” (1829mm).


NOTE: Clearance behind the nailing flange for both fireplace models is 1/2” (13mm).

NOTE: Adjacent wall considerations are for an adjacent wall to only a single side. Walls should not be placed at the minimum distance on both sides of the fireplace. Allow at least 4 feet on one side of the fireplace.

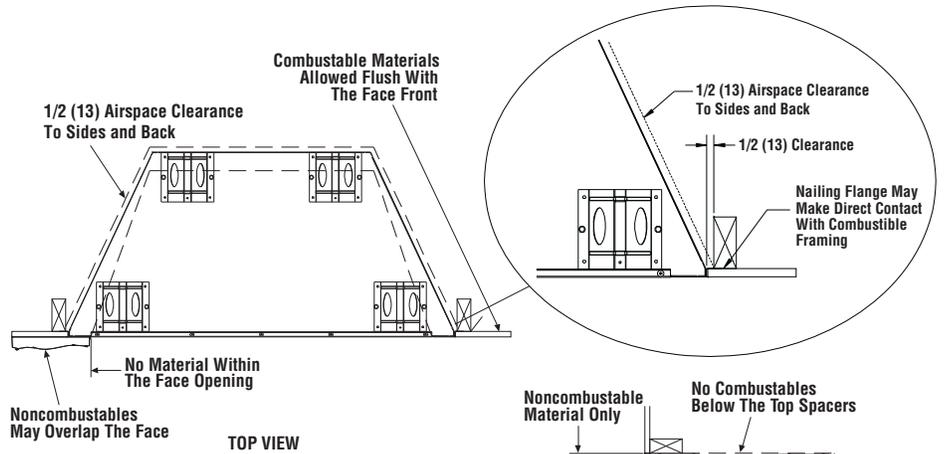

Inches (millimeters)

Clearances

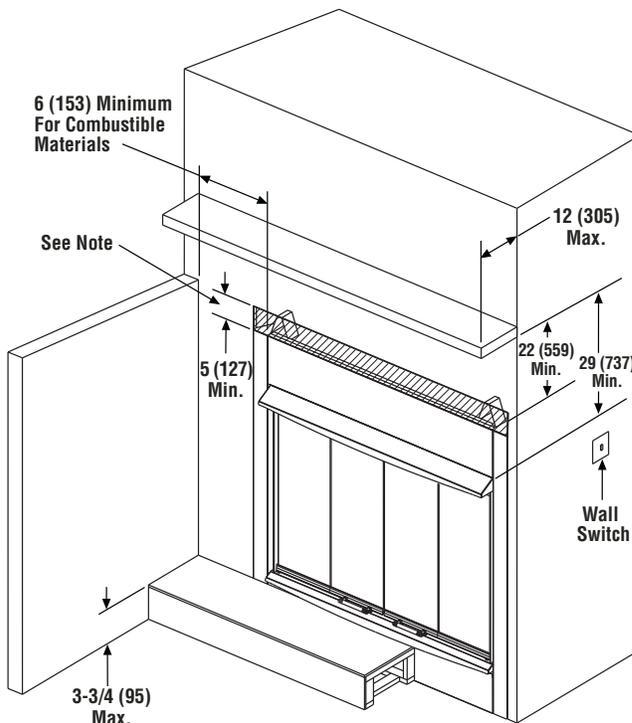

NOTE: The area above the face to the top of the spacers must be non-combustible materials.

